


Floodlight | XLED home 2 XL

Information copy

Day-bright light in XL size. Powerful XLED home 2 XL sensor-switched outdoor floodlight with 14 m sensor reach. Ideal for illuminating larger areas such as driveways, courtyards and gardens. Swivelling precision IR sensor covering 140°. Fully swivelling LED panel (180°, horizontally and vertically). Superior opal cover for optimum lighting. 1608 lm, 20 W, 140° angle of coverage, high thermal conductivity magnesium composite cooling system (HCMC).

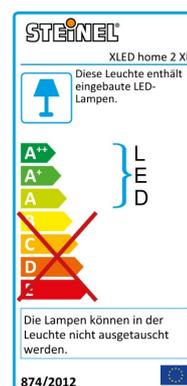

Details

5 JAHRE
GARANTIE

5 years functional warranty



2 - 2000 lux



IP44

LED

30 years (Ø 4,5h / day)



4000K neutral white



max. 14 m



180° horizontal, 90° vertical



networkable via cable



infrared sensor 140°



energy saving



8 sec - 35 min



Included STEINEL LED-System



HCMC cooling system



UV-protected material



Colour rendering index Ra \geq 80

Technical specifications Floodlight | XLED home 2 XL White

European Article Number (EAN) 4007841030070

Dimensions(w x h x d): 214 x 180 x 161 mm

Voltage 230 - 240 V, 50 Hz/60 Hz

Mains power 97 mA

Power factor 0.86

Sensor type Passive infrared

Output 20 W

Brightness 1608 lm

Efficiency 80 lm/W

Light colour 4000 K / SDCM 3

Colour rendering Ra \geq 80

LED life expectancy 50,000 h (L70B10 to LM80)

LED cooling system HCMC (High Conductive Magnesium Composite)

Floodlight positioning range 180° horizontally, 180° vertically

Detection angle 140° with sneak-by protection

Sensor swivelling range	180 °
Sensor tilting range	90 °
Reach	14 m
Time setting	8 sec. - 35 min.
Response brightness	2-2000 lx
Degree of protection (IP)	IP44
Protection class	II
Material	UV-resistant plastic
With lamp	STEINEL LED system
Temperature range	-20°C - +40°C
Lamp replaceable	No
Version	White

Application

under porches, driveways, courtyards, gardens