

# iCON 30S

Stylish toilet, bathroom and utility ventilation



## KEY FEATURES

- Low energy mixed flow fan
- Flow rate up to 132 m<sup>3</sup>/h
- Stylish, slim and unobtrusive in walls or ceilings
- Recessed or surface mounting
- Different colour covers available
- Unique iris shutter, prevents backdraughts, operates silently
- Interchangeable control modules match fan to installation requirements
- Low Watt motor - 12.2 W
- Low SFP 0.33 W/l/s
- Universal voltage 100 / 240 V - 50 / 60 Hz
- IPX4 rating
- Complies with Building Regulations
- 3 year warranty

## iCON 30S

iCON 30S 12 volt low energy fans with brushless DC motors offer significantly reduced energy consumption compared with standard AC motors. Fitted with ball-bearing motors for extra long life, each model is supplied with a remote mounting 100 / 240 V AC to 12 V DC transformer. Stylish, slim and unobtrusive in walls or ceilings.

iCON 30S is designed to provide ventilation levels that comply with the latest Building Regulations.

The iCON fan is an efficient, stylish and unique ventilation solution for the modern home. The shutter design makes switching on and off almost silent and helps reduce external noise ingress. The slim profile and iris shutter of the iCON make it a fan which will blend discreetly into any setting.



## MODULES

See module functionality page

<b>72573603</b>	PCS	Pull cord
<b>72574204</b>	PCTS	Pull cord with timer
<b>72682307B</b>	DTS	Delayed timer with pull cord
<b>72574202</b>	HTS	Humidity timer with pull cord
<b>72574203</b>	PRTS	Motion sensor timer
<b>72574201</b>	PRHTS	Motion sensor with humidity timer



## TECHNICAL DATA

Specification	iCON 30S
Air flow [m³/h / l/s]	132 / 37
Fan type	mixed flow
Mounting position	wall / ceiling
Sound pressure @ 3 m [dB(A)]	36.2
Power [W]	12.2
Specific Fan Power [W/(l/s)]	0.33
Building regulations	compliant
Duct diameter [mm]	100
Supply voltage	12 V DC transformer
Ingress protection rating	IPX4
Max ambient temperature [°C]	40
Weight [kg]	0.84
Dimensions H x W x D [mm]	225 x 225 x 144
Part number	<b>72683801</b>

## COVERS

<b>52634507</b>	Silver
<b>52634508</b>	Sandstone
<b>52634506</b>	Anthracite




Silver

Sandstone

Anthracite

## DIMENSIONS (mm)

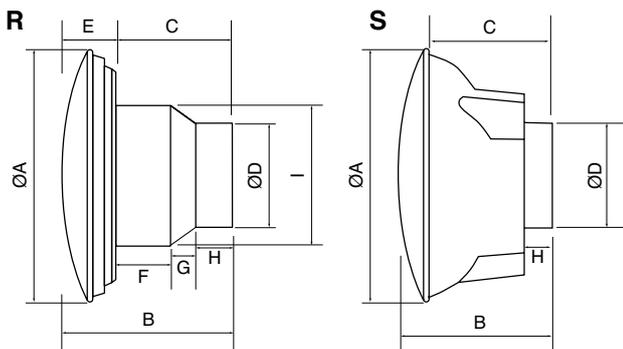


R = Recessed without skirt

S = Surface mounted with skirt

Model	A	B	C	D	E	F	G	H	I
iCON 30S (R)	225	144	101	97	43	51	20	30	148
iCON 30S (S)	225	144	92	97	-	-	-	29	-

## PERFORMANCE

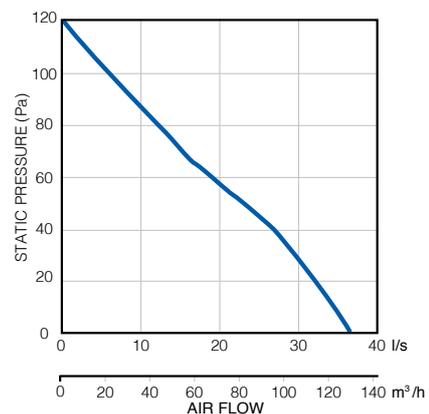

## CONTROLS AND ACCESSORIES

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

See accessories section for more details.

Call: 01494 525252

Visit: [airflow.com](http://airflow.com)



**Airflow Developments Limited**  
Aidelle House, Lancaster Road,  
Cressex Business Park,  
High Wycombe, Buckinghamshire,  
United Kingdom, HP12 3QP

E-mail: [info@airflow.com](mailto:info@airflow.com)  
Telephone: +44 (0) 1494 525252

[airflow.com](http://airflow.com)

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request

