



APRILEDP/OCTOW



Features

220-240V IP65 LED WiZ enabled tunable white Fire Rated Downlight

Supplied with matt white bezel as standard

Tunable between 2700K - 6500K via Wiz App and voice control

Remote driver with 2x1.5mm² + CPC loop-in, loop-out colour coded push fit piano terminals provide an easy and efficient installation

Detachable LED driver for fast fix install

Low profile design and remote driver allow installation into shallow ceiling voids

Fully tested for 30, 60 and 90 minute ceiling types to meet Part B of Building Regulations

Fully tested to meet Part C (moisture), Part E (acoustic) and Part L (energy) of Building Regulations

Wide 60° beam angle for increased light distribution


LED lifespan L70 60,000 hours

General Information

Lamp Type	LED
Colour / Finish	Matt White
Fire Rated	Yes
Bluetooth Enabled	Yes
IP Rating	IP65
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	90
Height (mm)	55
Accessories	APRILEDPBZ/CH, APRILEDPBZ/SC, APRILEDPBZ/BLK

Technical Information

Wattage	8W
Lumens Delivered	573lm (2700K) - 547lm (6000K)
Lm/W	82lm (2700K) - 78lm (6000K)
Beam Angle	60
CRI	Ra 80
CCT	Tunable White
Input	230V
Hertz	50/60Hz
Operating Temp	-5°C to 25°C

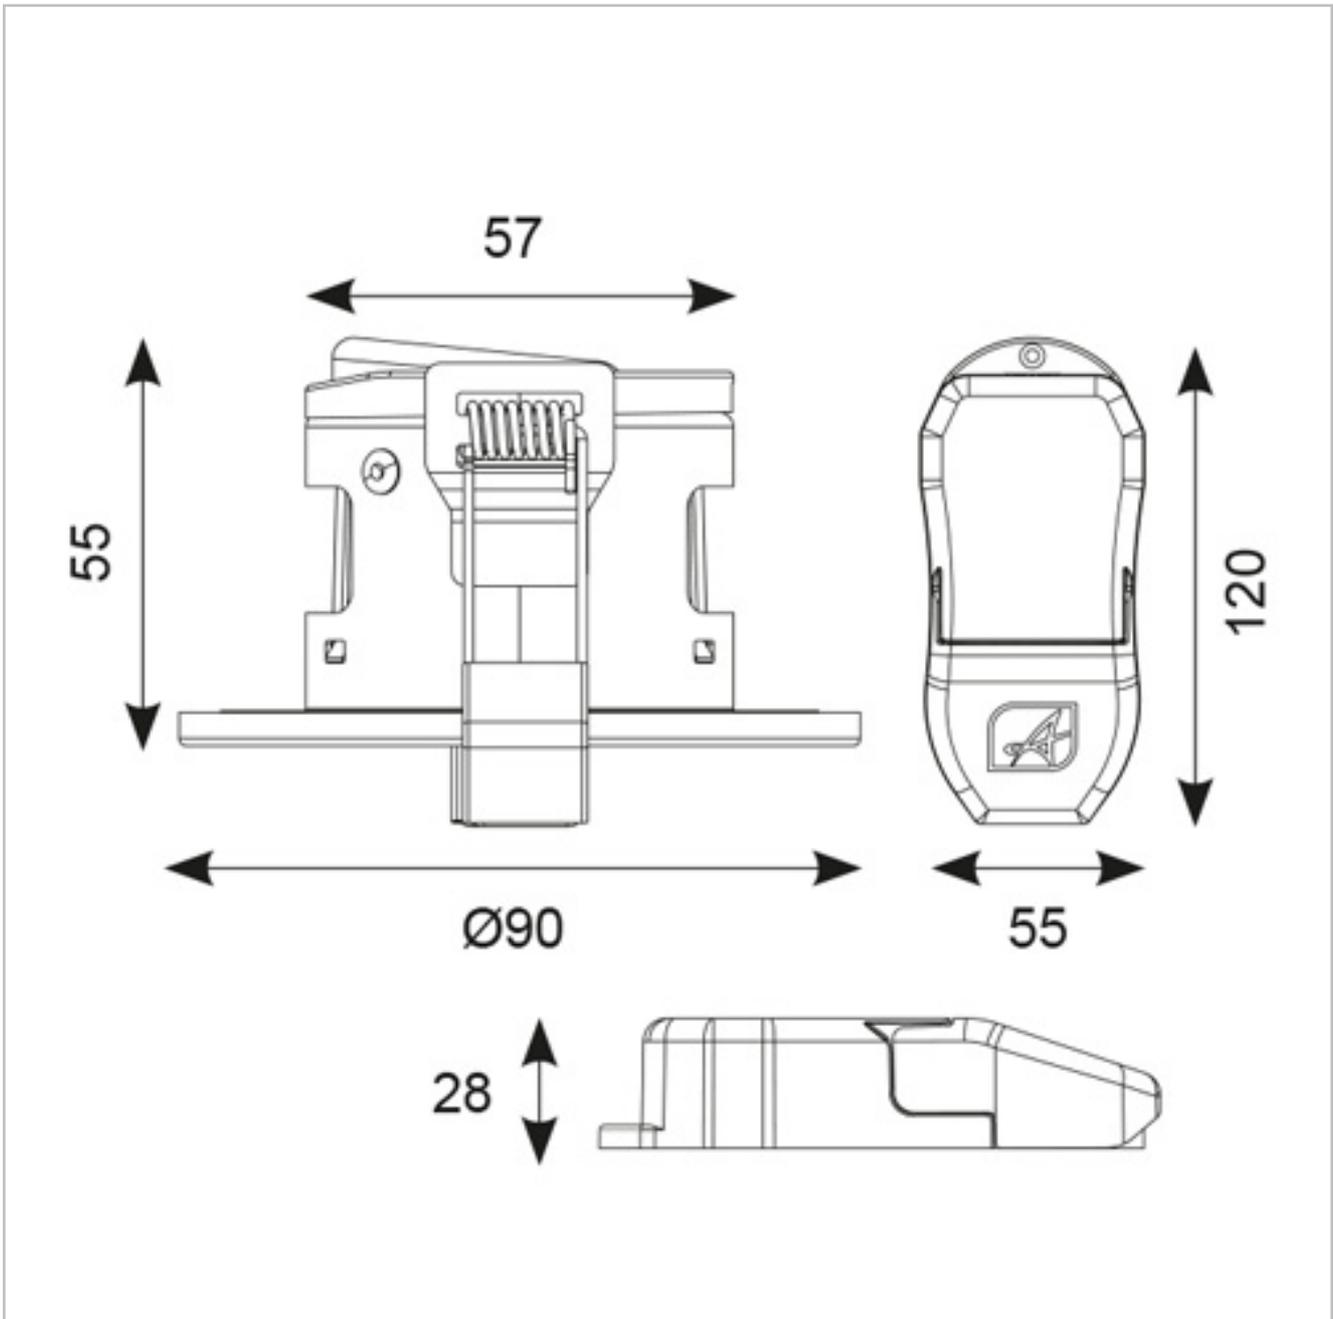

Datasheet generated from <https://onetimepim.com> last updated Friday, July 30, 2021 11:32:10 AM