


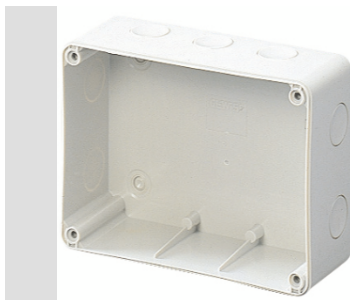

IP degree	IP44	Shock resistance	IK08
Houseable interloc. socket	1	Houseable IB socket-outlets	16/32 A
Side entries	4xØ 23	Top entries	3xØ 23
Bottom entries	3xØ 23	Glow Wire Test	650 °C
For socket-outlets	SBF horizontal	Electrocod	2220

TECHNICAL SYMBOLOGY

IK GWT

IK08

650 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 30/04/2019

Data, measures, designs and pictures are shown
only as informativ purposes,
and could be changed without previous notice