

5 5 Years
Product Warranty

2 2 Years
On-Site Warranty

1000V
Surge Protection



Mulu Mini Upgrade Jul. 2025

Standard IP65 LED emergency exit sign bulkhead


- All legends included
- Maintained and non-maintained option
- 20mm Conduit entry
- IP65 and IK10 (vandal resistant) for internal & external uses
- Dual entry push-wire terminal block for easy loop-in loop-out wiring
- BESA box fitting points

5 YEAR Battery warranty

Temp. Control

General Specification

Input 220-240Vac
Voltage 50/60Hz
Input Current (max) 40mA
Lifetime 50,000h
Emergency Conversion Time <1s
Emergency Operation Time 3h
Charging Time 24h
Ambient Temp 0°C to 50°C
Housing Polycarbonate

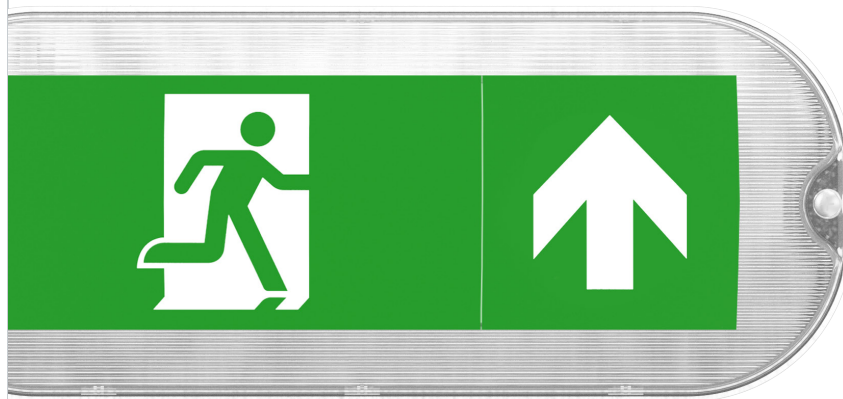

▲ Rotatable arrow sign



Standard With Temp. Control

Order Code	Input Power (max)	Emergency Output Power	CCT	Lumen
MULM01	4W	1W	6500K	50lm

Self-test (Only)

Order Code	Input Power (max)	Emergency Output Power	CCT	Lumen
MULM01/ST	3W	1W	6500K	50lm

Batteries

Order Code	Type	Capacity	Voltage
BATC15LFP1-MUM (for standard)	LiFePO4	1500mAh	3.2V
BAT18LFP1 (for self-test)	LiFePO4	1800mAh	3.2V

Order Code

MULM01
MULM01/ST

Dimensions

